


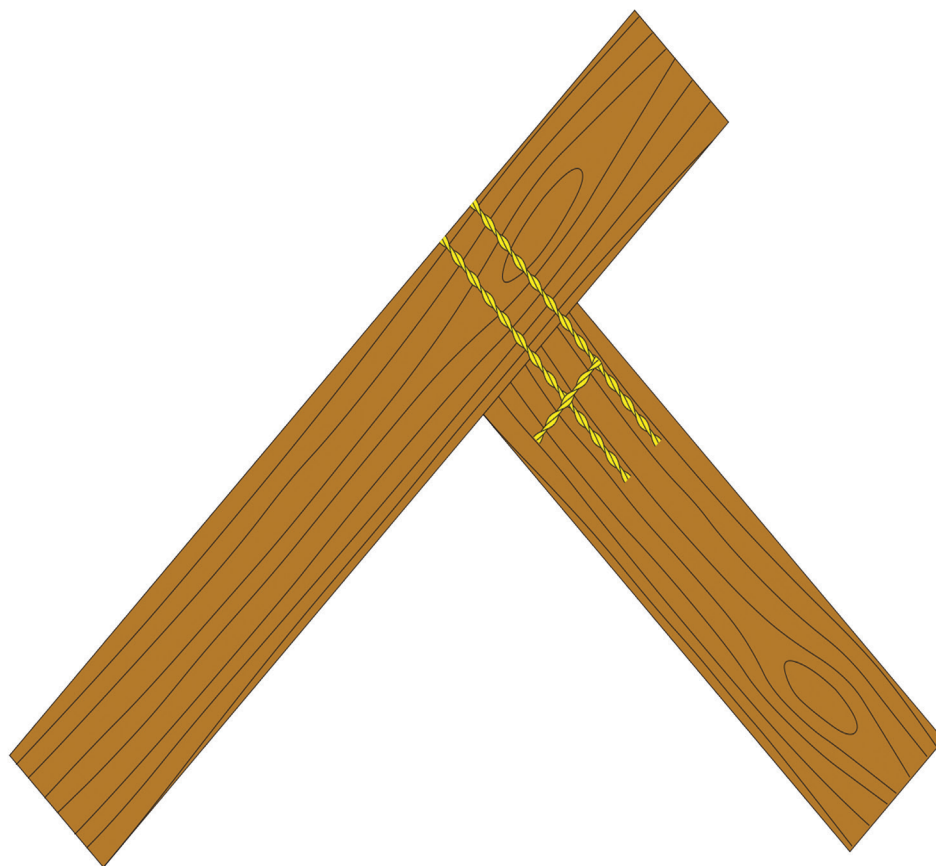

Method Statement

⚠ Read the safety information overleaf

1. Mark the location of the entry point and angle of the Fast Flex on timber.
2. If required pre drill using a pilot drill of specified size to aid penetration.
3. Install the Fast Flex by using the Fast Flex power support tool in a hammer drill.
4. Number of fixings per joint and minimum penetration into timber will depend upon the loading required.
5. Make good at the surface of all holes and leave ready for any decoration.

Guidelines

- a. 8 mm Fast Flex fixings are to be used.
- b. A 5 or 6mm pilot drill is to be used in hard timber.
- c. Where a specific loading is required a test unit can be used to measure the pull outs achievable at various depths of penetration.

Materials



Fast Flex 8 mm

Tooling



Fast Flex power support tool



Hammer Drill

Safety Equipment



Dust Mask



Eye Protection



Hand Protection



Ear Protection